


SYSTEM COMPOSITION

1. Perforated tray 90/500 th. 0,75 mm
2. Panolene cladding th. 90 mm
3. Particle board CTBH P5 th. 22mm
4. Acoustic panel PHONOTECH DK120


Absorption

$$\alpha_w = 1,00$$

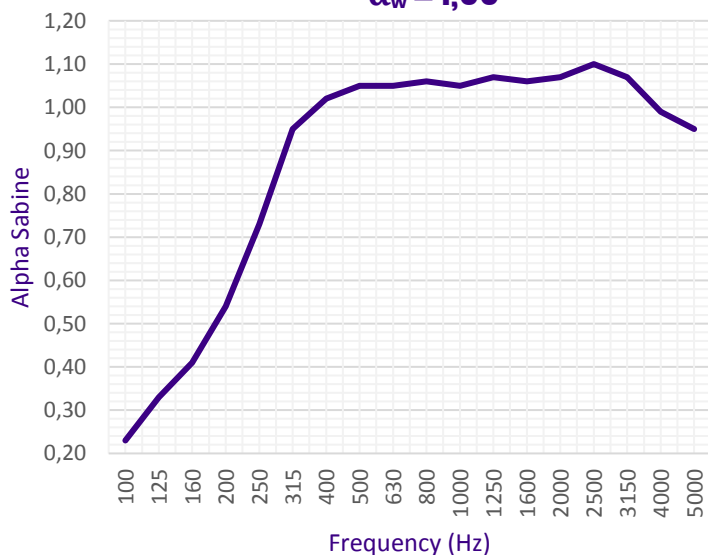

Insulation

$$R_w (C; C_{tr}) = 59 (-5 ; -12) \text{ dB}$$

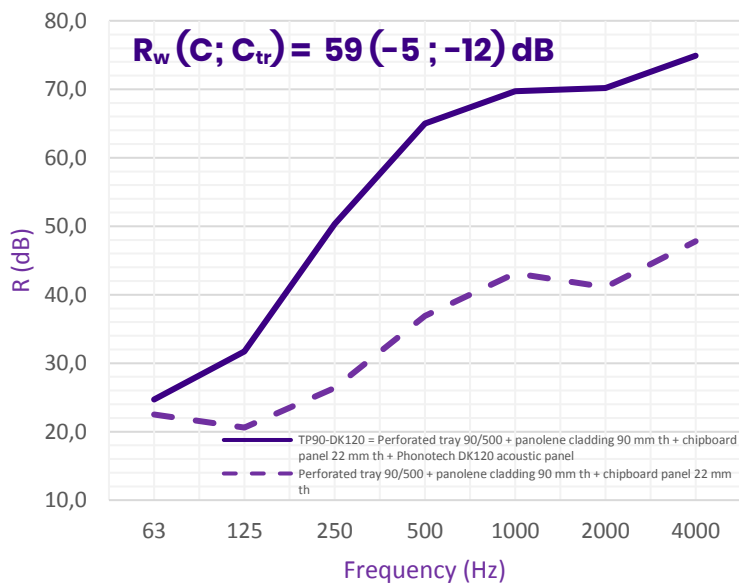

α_p per octave band (Hz)

Frequency (Hz)	125	250	500	1000	2000	4000
α_p	0,30	0,75	1,00	1,00	1,00	1,00

R (dB) per octave band (Hz)

Frequency (Hz)	63	125	250	500	1000	2000	4000
R (dB)	24,7	31,7	50,3	65,0	69,7	70,2	74,9

System	Sound reduction			α_w	Thermal R. (m ² .K/W)	U (W/m ² .K)	Weight (kg/m ²)	Thickness (mm)	PV
	R _w (dB)	RA (dB)	RA, tr (dB)						
TP90-DK120	59	54	47	1,00	6,09	0,16	48,78	254	CEDIA (02/18)

ADRESS
 Zoning Industriel les Plénesses
 Rue des Waides 8, 4890 Thimister
 Belgium

WEBSITE
www.phonotech.com
E-MAIL
info@phonotech.com

PHONE
 +32 (0) 87 33 33 30
FAX
 +32 (0) 87 78 52 30